



NT 65/2 Ap

The NT 65/2 Ap is a powerful, 2-motor wet and dry vac for professional applications. The suction power remains nearly constant due to the efficient cleaning of the flat pleated filter by blasts of air.

1 On-board storage

■ The large on-board storage space on the casing head ensures that tools and accessories are always stored and close to hand.

3 ApClean (semi-automatic filter cleaning)

- The free filter means that the user can work for long intervals without interruption.
- Optimum suction power with high efficiency.

2 Integrated drain hose (oil-resistant)


Easily accessible drain hose for convenient liquid disposal.

4 Hose and bend attachment

Convenient suction hose and bend attachment for easy transport and storage.

TECHNICAL DATA AND EQUIPMENT



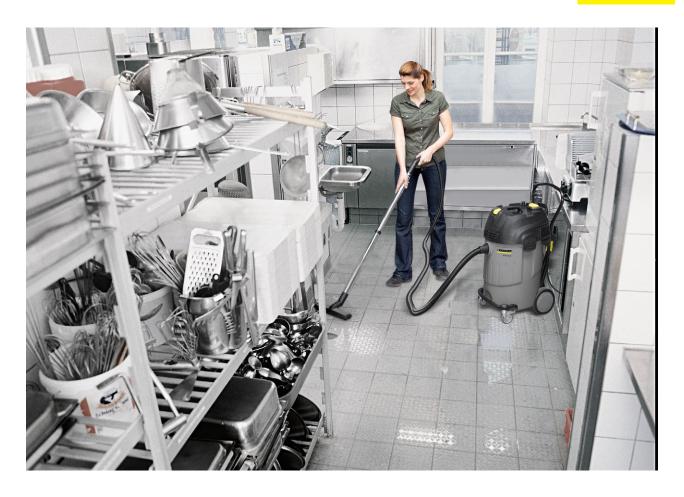

NT 65/2 Ap

- Semi-automatic filter cleaning
- Flat pleated filter (dust class M)
- Drain hose and push handle

| Technical data | | |
|---------------------------|-------------|-------------------------|
| Order no. | | 1.667-291.0 |
| EAN code | | 4039784727281 |
| Current type | Ph / V / Hz | 1 / 220 - 240 / 50 - 60 |
| Air flow | I/s | 2 x 74 |
| Vacuum | mbar / kPa | 254 / 25.4 |
| Container content | I | 65 |
| Container material | | plastic |
| Rated input power | W | max. 2760 |
| Standard nominal diameter | | DN 40 |
| Cable length | m | 10 |
| Sound pressure level | dB(A) | 73 |
| Number of motors | | 2 |
| Weight | kg | 20 |
| Dimensions (L × W × H) | mm | 600 × 480 × 920 |

| Equipment | | | | |
|--|--------------|--|--------------------|----|
| Suction hose | m | 4 / with bend | Protection class | II |
| Suction tube | piece(s) × m | 2 × 0.5 / metal | Stop swivel castor | |
| Filter bag | piece(s) | 1 / Paper | | |
| Wet/dry floor nozzle | mm | 360 | | |
| Crevice nozzle | | | | |
| Drain hose (oil-resistant) | | | | |
| Automatic cut-out features at max. filling quality | | • | | |
| Flat pleated filter | | Paper | | |
| Filter cleaning | | ApClean (semi-automatic filter cleaning) | | |
| Sturdy bumper | | | | |
| Push handle | | • | | |

■ Included in the scope of supply.





















| | | Order no. | Anzahl | Dummy | Dummy | Dummy | Price | Description |
|--|---|-------------|-------------|-------|-------|-------|-------|---|
| Flat pleated filter, paper | | ı | | - | | I. | | |
| Flat pleated filter, paper | 1 | 6.904-283.0 | 1 piece(s) | | | | | Paper, dust class M (also NT 65/2 Eco / opt. for NT 75/2 Eco Tc models). |
| Flat pleated filter HEPA, dust class I | Н | | | | | | | |
| HEPA flat pleated filter | 2 | 6.904-364.0 | 1 piece(s) | | | | | HEPA flat pleated filter, dust class H (HEPA 13). |
| Flat pleated filter, PES | | | | | | | | |
| Flat pleated filter, PES | 3 | 6.904-284.0 | 1 piece(s) | | | | | Polyester fleece, rot-proof, dust class M (also for NT 65/2 Eco / Me / Tc and NT 72/2 Eco Tc). |
| Flat pleated filter, PTFE | | | | | | | | |
| Flat pleated filter, PTFE | 4 | 6.907-449.0 | 1 piece(s) | | | | | Polyester fleece with PTFE coating, dust class M, for Tact ² vacuum cleaners. Particularly suitable for very adhesive materials. |
| Wet filter bag | | | • | | | | | |
| Wet filter bag | 5 | 6.904-252.0 | 5 piece(s) | | | | | Dust class L, general cleaning, dry and wet, tear-resistant. |
| Paper filter bags | | | | | | | | |
| Paper filter bags | 6 | 6.904-285.0 | 5 piece(s) | | | | | Dust class M, triple-ply, reinforced outer layer, tear-resistant. |
| Plastic sacks for dust-free disposal | | | | | | | | |
| Plastic bag for dust-free disposal | 7 | 6.900-698.0 | 10 piece(s) | | | | | PE plastic sack for dust-free disposal. |
| Fabric filter | | | | | | | | |
| Membrane filter | 8 | 6.904-282.0 | 1 piece(s) | | | | | Polyester needle fleece, dust class M, washable (40 °C). Not suitable for dust class H applications. |
| Fleece filter bags | | | | | | | | |
| Fleece filter bags | 9 | 2.885-753.0 | 5 piece(s) | | | | | |

[■] Included in the scope of supply.

□ Available accessories.































| | | | | | | | | | T |
|---|----|-------------------------------|------------|-----------|------------|--------|-------|---|------------|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | Order no. | Anzahl | Nennweite | Länge | Breite | Price | Description | |
| Bend, plastic | | | | | | I. | | 1 | |
| DN 40 bend | 1 | 2.889-171.0 | 1 piece(s) | 40 | | | | Bend for the new clip system in nominal size DN 40. | |
| Plastic bend | 2 | 5.031-718.0 | 1 piece(s) | 35 | | | | Plastic with C 35 clip system. | |
| Bend, plastic, electrically conduc- | 3 | 5.031-939.0 | 1 piece(s) | 35 | | | | Plastic, DN 35 with C 35 clip system, electrically conductive | 2. 🗆 |
| tive | 4 | 5.032-427.0 | 1 piece(s) | 40 | | | | Plastic, with C 40 clip system, electrically conductive. | |
| Bend | 5 | 2.889-148.0 | 1 piece(s) | 35 | | | | Ergonomic bend for the new clip system. With airflow control slide, in an antistatic design. | |
| Floor nozzles | | | | | | | | * | |
| Wet/dry floor nozzle, plastic Adv, DN 40 | 6 | 2.889-153.0 | 1 piece(s) | 40 | | 360 mm | | 360 mm wide wet and dry floor nozzle with easy-to-change inserts, squeegees. | e = |
| Multi-purpose nozzle, wet/dry | 7 | 6.903-018.0 | 1 piece(s) | 40 | | 370 mm | | Aluminium with height-adjustable rollers, brush strips (6.903-064.0) and squeegees (6.903-081.0, oil-resistant). | |
| | 8 | 6.906-383.0 | 1 piece(s) | 40 | | 450 mm | | Aluminium with height-adjustable rollers, brush strips (6.903-065.0) and squeegees (6.906-146.0). | |
| | 9 | 6.906-384.0 | 1 piece(s) | 35 | | 370 mm | | Aluminium with height-adjustable rollers, brush strips (6.903-064.0) and squeegees (6.903-081.0, oil-resistant). | |
| Wet and dry floor nozzle | 10 | 2.889-117.0 | 1 piece(s) | 40 | | 400 mm | | The wet and dry floor nozzle (ID 40) permits a quick squee- gee/ brush change and is suitable for wet vacuum cleaning of large areas. | |
| Crevice nozzles | | | | | _ | | | or range areas. | |
| DN 40 crevice nozzle for wet and dry vacuum cleaner | 11 | 5.130-655.0 | 1 piece(s) | DN 40 | | | | | • |
| Crevice nozzle | 12 | 6.900-385.0 | 1 piece(s) | DN 35 | 210 mm | | | Plastic. | |
| | 13 | 6.900-922.0 | 1 piece(s) | 35 | 500 mm | | | Metal. | |
| | 14 | 6.905-817.0 | 1 piece(s) | 40 | 400 mm | | | | |
| Suction tubes, stainless steel | | | | | | | | | |
| Set suction tube stainless steel NW40 55 | 15 | 2.889-194.0 | 2 piece(s) | 40 | 550 mm | | | Stainless steel suction tube set (2 x 0.55 m). | • |
| Suction tube | 16 | 6.902-081.0 | 1 piece(s) | 40 | 500 mm | | | For use in wet or damp environments or for wet vacuuming | g. 🔲 |
| | 17 | 6.906-531.0 | 1 piece(s) | 40 | 1000 mm | | | | |
| | 18 | 6.902-154.0 | 1 piece(s) | 35 | 500 mm | | | Mainly for wet vacuuming or for vacuuming corrosive media. | |
| Bends, stainless steel | | | | | | | | | |
| Bend, stainless steel, ID 35 | 19 | 6.903-141.0 | 1 piece(s) | 35 | | | | Stainless steel. | |
| Bend, stainless steel, ID 40 | 20 | 6.902-079.0 | 1 piece(s) | 40 | | | | | |
| Bends, metal | | | | | | | | _ | Ļ |
| Bend, metal | 21 | 6.900-519.0 | 1 piece(s) | 35 | | | | Metal, ID 35. | |
| | 22 | 6.900-276.0 | 1 piece(s) | 40 | | | | Metal, ID 40. | |
| All-purpose brushes | | | | | | | | | |
| All-purpose brush | 23 | 6.903-863.0 | 1 piece(s) | 35 | 120 mm | | | Natural bristles (ox hair), bristle element 120 x 45 mm, ID 35. | |
| Car cleaning nozzles | | | | 1 | | | | | |
| DN 40 car nozzle, NT clip system | 24 | 2.840-095.0 | 1 piece(s) | DN 40 | | 90 mm | | | |
| DN 40 car nozzle | 25 | 6.900-952.0 | 1 piece(s) | DN 40 | | 90 mm | | Plastic. | |
| Rubber suction tools, nose 45° | | 1 | | | | ı | | 1 | |
| Rubber suction tool, nose 45° | _ | 6.902-104.0 | 1 piece(s) | 35 | 220 mm | | | For vacuuming machines, oil-resistant. | |
| | 27 | 6.902-105.0 | 1 piece(s) | 40 | 220 mm | | L | For vacuuming machinery, oil-resistant. | |
| Pipe dusting nozzles | | 1 | 1 . | 1. | | | ı | | 1- |
| Pipe brush 35/100 | | 6.903-035.0 □ Available ac | 1 piece(s) | 35 | | | | Plastic, tube diameter 100 mm. | |







| | | Order no. | Anzahl | Nennweite | Länge | Breite | Price | Description | |
|----------------------|----|-------------|------------|-----------|--------|--------|-------|--------------------------------|--|
| Pipe brush 35/200 | 29 | 6.903-036.0 | 1 piece(s) | 35 | | | | Plastic, tube diameter 200 mm. | |
| Suction tubes, metal | | | | | | | | | |
| Suction tube | 30 | 6.900-514.0 | 1 piece(s) | 35 | 500 mm | | | Metal, chromium-plated. | |

 $[\]blacksquare$ Included in the scope of supply. $\hfill\Box$ Available accessories.































| | | | | | | | | \top |
|---|----|-------------|-------------|-----------|-------|-------|--|--------|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | Order no. | Anzahl | Nennweite | Länge | Price | Description | |
| Complete suction hoses (clip system | n) | | | | | | | |
| Suction hose DN 40, length 4 m | 1 | 2.889-138.0 | 1 piece(s) | 40 | 4 m | | 4 m long suction hose with new bayonet and clip fastener. | |
| Suction hose | 2 | 4.440-678.0 | 1 piece(s) | 40 | 4 m | | With bend, C ID 40. | |
| Suction hose + PFC module | 3 | 4.440-679.0 | 1 piece(s) | 40 | 4 m | | With bend and module (4.060-474.0). | |
| Suction hose + PFC module, electri- | 4 | 4.440-728.0 | 1 piece(s) | 40 | 4 m | | With bend and module (4.060-533.0), electrically conduc- | |
| cally conductive | | | | | | | tive. | |
| Electrically conductive suction hose | 5 | 2.889-137.0 | 1 piece(s) | 35 | 4 m | | 4 m suction hose with new bayonet and clip fastener. Electrically conductive. | |
| Suction hose | 6 | 2.889-139.0 | 1 piece(s) | 40 | 2.5 m | | Suction hose with new bayonet and clip fastener. Length: 2.5 m. | |
| Suction hose, oil-resistant | 7 | 2.889-140.0 | 1 piece(s) | 40 | 4 m | | Oil-resistant suction hose with new bayonet and clip fasten er. Length: 4 m. |)- |
| Electrically conductive suction hose | 8 | 2.889-141.0 | 1 piece(s) | 40 | 4 m | | 4 m long, electrically conductive suction hose with new bayonet and clip fastener. | |
| nose | 9 | 2.889-142.0 | 1 piece(s) | 40 | 2.5 m | | Suction hose, electrically conductive, with new bayonet and | |
| | | | | | | | clip fastener. 2.5 m long. | |
| Repair kits | | | 1 | 1 | | | Is a contract to the contract of the contract | |
| Repair kit, C 40 | 10 | 2.639-873.0 | 1 piece(s) | 40 | | | Suction hose repair kit (clip system). | |
| Repair kit, ID 61 | 11 | | 1 piece(s) | 61 | | | Suction hose repair kit. | |
| Repair kit ID 40 | 12 | 2.889-150.0 | 1 piece(s) | 40 | | | Repair kit ID 40 for the new clip system. | |
| Suction hoses (clip system) | | | 1 | 1 | 1 | | Laurence de la companya de la compan | |
| Suction hose | _ | 6.906-279.0 | 1 piece(s) | 40 | 10 m | | With bayonet and clip connection, C-45. | |
| | 14 | | 1 piece(s) | 40 | 4 m | | With bayonet and clip connection, C 40. | |
| | 15 | | 1 piece(s) | 40 | 4 m | | With bayonet and clip connection, oil-resistant, C-45. | |
| | 16 | 6.906-546.0 | 1 piece(s) | 40 | 4 m | | With bayonet and clip connection, electrically conductive, C 40. | |
| | 17 | 6.906-635.0 | 1 piece(s) | 40 | 16 m | | With bayonet and clip connection, C-40. | |
| | 18 | 6.906-877.0 | 1 piece(s) | 40 | 10 m | | With bayonet and clip connection, electrically conductive, C-40. | |
| Suction hoses complete | | | | | | | C 40. | |
| Suction hose, complete | 19 | 4.440-264.0 | 1 piece(s) | 61 | 4 m | | Plastic. | |
| | 20 | 4.440-328.0 | 1 piece(s) | 61 | 3 m | | Industrial hose, PVC / elastomer with steel spiral, smooth inside. | |
| | 21 | 4.440-467.0 | 1 piece(s) | 61 | 10 m | | Plastic. | |
| Suction hose, complete, oil-resist- | 22 | | 1 piece(s) | 61 | 4 m | - | Oil-resistant. | |
| ant | | | | | | | | |
| Suction hose, complete, electrically conductive | 23 | | 1 piece(s) | 61 | 4 m | | Electrically conductive. | |
| Suction hose, complete | 24 | 4.440-263.0 | 1 piece(s) | 40 | 4 m | | Plastic. | |
| | 25 | 4.440-303.0 | 1 piece(s) | 40 | 4 m | | Oil-resistant. | |
| | 26 | 4.440-463.0 | 1 piece(s) | 40 | 10 m | | Plastic. | |
| | 27 | 4.440-466.0 | 1 piece(s) | 40 | 10 m | | Electrically conductive, plastic. | |
| Suction hose, complete, oil-resistant | 28 | 4.440-612.0 | 1 piece(s) | 40 | 10 m | | Oil-resistant. | |
| Connecting sleeves | | | | | | | | |
| Adapter, ID 32/35, with internal thread | 29 | 6.902-077.0 | 1 piece(s) | 32 | | | For connecting two suction hoses (not ESB 28 and 34). | |
| Connecting adapter, ID 40, with internal thread | 30 | 6.900-286.0 | 1 piece(s) | 40 | | | For connecting two suction hoses, threaded at both ends. | |
| Connecting sleeve, ID 61, with female thread | 31 | 6.902-078.0 | 1 piece(s) | 61 | | | | |
| | l | | | | | | | |







| | | Order no. | Anzahl | Nennweite | Länge | Price | Description | |
|-------------------------------|----|-------------|------------|-------------|--------|-------|--|---------|
| Extension hoses (clip system) | | order no. | Alizalli | Neililweite | Lalige | FIICE | DESCRIPTION . | \perp |
| Extension hose | 32 | 6.906-344.0 | 1 piece(s) | 40 | 2.5 m | | For all C-40 hoses. | |
| | 33 | 2.889-146.0 | 1 piece(s) | 40 | 2.5 m | | Extension hose for new clip system ID 40. Length: 2.5 m. | |

[■] Included in the scope of supply.

□ Available accessories.







| Teleskopstangen | | Order no. | Flow rate | Inlet tempera- ture | Length | Length | Price | Description |
|---------------------------|---|-------------|-----------|------------------------|--------|--------|-------|---|
| Telescopic lance TL 10 H | 1 | 4.762-611.0 | | max. 60 °C | | | | Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. |
| Telescopic lance TL 10 C | 2 | 4.762-612.0 | | max. 60 °C | | | | Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels. |
| TL vacuum cleaner adapter | 3 | 9.751-306.0 | | | | | | TL suction cup for 10 and 14 m long telescopic lances comprising suction bend connection (DN 35, DN 40) and connection for the suction nozzles. |

 $[\]blacksquare$ Included in the scope of supply. \qed Available accessories.































| | | Order no. | Anzahl | Nennweite | Price | Description | |
|---|---------|--------------------|------------|-----------|-------|---|----------|
| Y-adapter kit | | | | | | | Ė |
| Y-adapter kit | 1 | 2.637-217.0 | 1 piece(s) | 35 | | Distributor, plastic. | [|
| Connection adapter C ID (clip to con | e), ele | ectrically conduc | tive | | | | |
| Connection adapter C DN 35 | 2 | 5.407-112.0 | 1 piece(s) | 35 | | C 35 hose connection for ID 35 accessories, electrically conductive. | |
| Connection adapter C DN 40 | 3 | 5.407-109.0 | 1 piece(s) | C-DN 40 | | C 40 hose connection for ID 35 accessories, electrically conductive. | [|
| | 4 | 5.407-111.0 | 1 piece(s) | 40 | | C 40 hose connection for ID 40 accessories, electrically conductive. | |
| Adapter clip DN 35 on cone DN 35 | 5 | 5.407-005.0 | | | | | |
| Adapter clip DN 40 to cone DN 40 | 6 | 5.407-006.0 | | DN 40 | | | |
| Connection adapter for power tools | , clip- | on, electrically c | onductive | | | | |
| Connection adapter for power tools, C 35, electrically conductive | 7 | 5.453-042.0 | 1 piece(s) | 35 | | Plastic, adjustable from ID 26-36 (Te / Eco M / H), electrica ly conductive. | 11- |
| | 8 | 5.453-048.0 | 1 piece(s) | 35 | | Inside Ø 25.4 mm, outside Ø 34.6 mm / 38 mm, electrically conductive. | [|
| | 9 | 5.453-050.0 | 1 piece(s) | 35 | | Inside Ø 27 mm, outside Ø 36.5 mm / 38.8 mm, electrically conductive. | <u> </u> |
| Adapter for electric power tools, sci | rewab | le | | | | | L, |
| Adapter for electric power tools, | 10 | 5.453-016.0 | 1 piece(s) | 35 | | Plastic, adjustable from ID 26-36. | [|
| screwable, ID 35 | | 5.453-026.0 | 1 piece(s) | 35 | | Inside Ø 28.6 mm, outside Ø 37.3 mm / 38.8 mm. | [|
| | 12 | 6.902-059.0 | 1 piece(s) | 35 | | Inside Ø 32 mm, outside Ø 39 mm. | [|
| | 13 | 6.902-095.0 | 1 piece(s) | 35 | | Inside Ø 28 mm, outside Ø 34 / 38.8 mm, electrically conductive. | [|
| Expansion pieces (tube -> nozzle) | | | | | | | ļ, |
| Adapter | 14 | 5.453-019.0 | 1 piece(s) | 40 | | From ID 40 to ID 61, plastic. | [|
| Reducing sleeves | | 1 | | | | | |
| Reducer | 15 | 5.407-108.0 | 1 piece(s) | 40 | | From C 40 hose with outer thread 35 for connection bushing, screwable, ID 35. | [|
| Reduction bushing | 16 | 5.407-113.0 | 1 piece(s) | 40 | | Reduction bushing from clip C 40 to clip C 35. | [|
| Reducers (tube -> nozzle) | | | | | | | |
| Reducer | 17 | 6.902-017.0 | 1 piece(s) | 40 | | From ID 40 to ID 35, plastic. | [|
| Reducer from ID 35 to ID 32 | 18 | 6.902-072.0 | 1 piece(s) | 35 | | From ID 35 to ID 32, metal. | |
| Reduction/expansion adapter kit | | | | | | | |
| Set of reducers / adapter sleeves | 19 | 2.860-117.0 | 1 piece(s) | | | ID 40/35, ID 35/32 (tube -> nozzle), plastic. | 1 |

 $[\]blacksquare$ Included in the scope of supply. $\hfill\Box$ Available accessories.









| | | Order no. | ID | | Price | Description | |
|-------------------------------------|---------|----------------|-------|--|-------|----------------------------|--|
| Target-group-specific accessory kit | s for v | acuum cleaners | | | | | |
| Professional cleaning kit | 1 | 2.637-353.0 | DN 40 | | | Professional cleaning kit. | |
| Car cleaning accessory kit | 2 | 2.862-166.0 | DN 35 | | | Car cleaning kit. | |
| Swarf kit | 3 | 2.640-760.0 | DN 61 | | | Swarf kit. | |

 $[\]blacksquare$ Included in the scope of supply. \qed Available accessories.







| | | Order no. | Anzahl | Breite | | Price | Description | |
|---------------------------------------|---|-------------|------------|--------|--|-------|--|--|
| Other | | | | | | | | |
| CS 40 Me | 1 | 2.863-026.0 | 1 piece(s) | | | | Cyclone preseparator for use with wet and dry vacuum cleaners for very large quantities of dust. | |
| Adapter connection, electroconductive | 2 | 5.031-436.0 | | | | | | |

 $[\]blacksquare$ Included in the scope of supply. $\hfill\Box$ Available accessories.





| | | T | T | T | 1 | | | | |
|------------------------------------|------|-------------|------------|----|--------|-------|-------|--|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | Order no. | Quantity | ID | Length | Width | Price | Description | |
| Modification kit, non-conductive m | edia | | | | | | | | |
| Attachment kit, non-conductive | 1 | 2.642-602.0 | 1 piece(s) | | | | | For switching off when vacuuming non-conductive fluids | |
| media Tact² + Ap | | | | | | | | such as oils and greases | |

[■] Included in the scope of supply.

□ Available accessories.





| | | Order no. | Length | Colour | Quanti- ty | Price | Description |
|-----------------|---|-------------|--------|--------|---------------|-------|---|
| Miscellaneous | | | | | | | |
| Extension cable | 1 | 6.647-022.0 | 20 m | | 1 piece(s) | | Extension cable, 20 m, 3x1.5 mm². With splash-proof earthing pin plug, strain relief and anti-kink sleeve. $\hfill\Box$ |

[■] Included in the scope of supply.

□ Available accessories.